





常规系列 (General purpose) DJ1200(2V1200Ah)

规格 Specifications

额定电压	Rated Voltage			2V
标称容量	Nominal Capacity (C ₁₀ , 1.80V/cell)			1200Ah
尺寸	Dimension	长	Length	475±3mm (16.14 in.)
		宽	Width	175±3mm (6.89 in.)
		高	Container Height	328±3mm (12.99 in.)
		总高(含端子)	Total Height	350±3mm (13.78 in.)
重量	Approx Weight			68.9 Kg (127.59 lbs)
端子	Terminal			M8
外壳材料	Container Material			ABS
额定容量	Rated Capacity (25°C)	1272.0Ah	C20(63.6A, 1.80V/cell)	
		1200.0Ah	C10(120.0A, 1.80V/cell)	
		1050.0Ah	C5(210.0A, 1.75V/cell)	
		936.0Ah	C3(312.0A, 1.75V/cell)	
		720.0Ah	C1(720.0A, 1.67V/cell)	
5S最大放电电流		Max. Discharge Current		9600A (5s)
内阻	Internal Resistance (25°C)			Approx 0.30mΩ
运行温度	Operating Temp.Range	放电	Discharge	-20 ~ 55°C (-4 ~ 131°F)
		充电	Charge	0 ~ 40°C (32 ~ 104°F)
		存储	Storage	-15 ~ 50°C (5 ~ 122°F)
推荐温度	Nominal Operating Temp. Range			25±5°C (77±5°F)
最大充电电流 (25°C)Max.Charging Current		360.0A		
充电电压 (25°C)	Charge voltage	浮充	Float	2.25V
		温度补偿	Temp. Coefficient	-3mV/单格/°C
		循环(均充)	Cycle(Equalization)	2.35~2.40V
温度对容量影响	Effect of temp. to Capacity	40°C (104°F)	106%	
		25°C (77°F)	100%	
		0°C (32°F)	86%	
自放电	Self Discharge	≤3%/月 @ 25°C		



外形 Layout

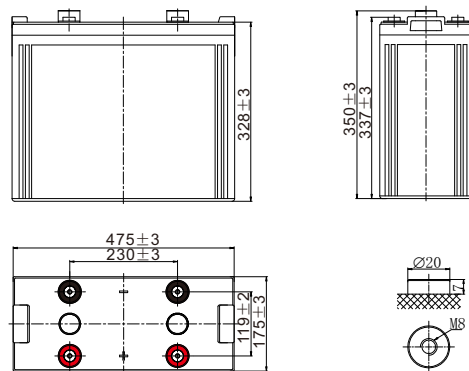

恒流放电表(A) 25 °C Constant Current Discharge

F.V/Time	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	856.7	677.3	592.8	455.7	369.2	280.9	225.9	190.6	165.5	134.5	112.4	60.3
1.80V/cell	968.5	757.3	656.0	498.6	401.7	303.9	243.5	205.3	177.5	144.0	120.0	63.6
1.75V/cell	1012.2	788.1	680.3	515.4	414.0	312.0	249.6	210.0	181.2	146.6	121.9	64.4
1.70V/cell	1056.9	818.0	705.3	532.8	427.2	321.1	255.9	214.8	185.1	149.2	123.8	65.2
1.67V/cell	1083.6	836.4	720.0	542.4	434.3	326.0	259.4	217.5	187.3	150.8	124.9	65.7
1.60V/cell	1144.8	879.6	755.0	566.6	452.4	338.0	268.1	224.1	192.6	154.3	127.5	66.9

恒功率放电表(W) 25 °C Constant Power Discharge

F.V/Time	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1655.7	1313.3	1152.2	888.6	721.6	550.7	444.0	375.3	326.3	265.8	222.5	119.9
1.80V/cell	1856.2	1457.7	1266.6	966.7	781.1	593.4	476.9	403.0	349.1	283.9	237.1	126.4
1.75V/cell	1923.5	1505.3	1304.1	993.1	800.6	606.6	487.0	410.9	355.4	288.5	240.4	127.9
1.70V/cell	1990.1	1550.2	1342.7	1020.5	821.9	621.5	497.5	419.0	362.2	293.0	243.8	129.4
1.67V/cell	2029.5	1577.1	1364.2	1035.0	832.7	629.1	503.2	423.3	365.8	295.7	245.7	130.3
1.60V/cell	2116.6	1641.0	1417.1	1072.3	861.1	648.4	517.3	434.4	374.5	301.8	250.2	132.5



常规系列 (General purpose) DJ1200(2V1200Ah)

应用 Applications

- 通讯
Telecommunications
- UPS、数据机房
UPS、Data Rooms
- 紧急照明、安防
Emergency Lighting、Security
- 储能、电力
Energy Storage、Electric Systems
- 新能源系统
New Energy Systems


特征 General Features

- 25°C下，设计浮充寿命可达16年。
Under 25°C, the designed floating life is up to 16 years.
- 特殊的排气结构和密封技术, 使用安全可靠, 安装灵活, 维护便捷。
Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance.


标准 Standards

- 符合IEC 60896, GB/T19638, YD/T 799 和DL/T 637标准
Compliance with IEC 60896, GB/T19638, YD/T 799 and DL/T 637 standards
- UL 认证, 泰尔认证
UL Certified, TLC Certified
- 企业通过了TS16949, OHSAS 18001, ISO 9001和ISO 14001体系认证
Manufactured in Leoch®TS16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


放电特性曲线 Discharge Characteristics

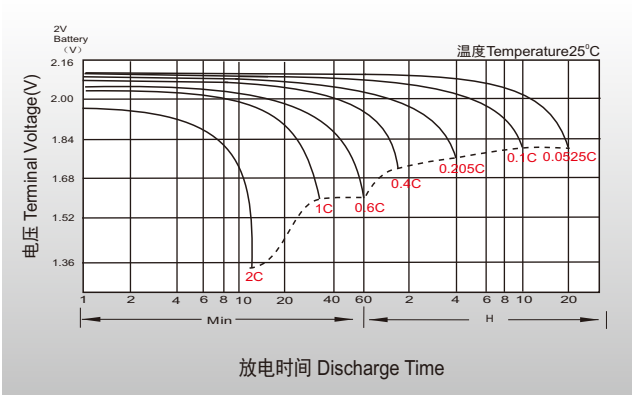

浮充特性曲线 Float Charging Characteristics

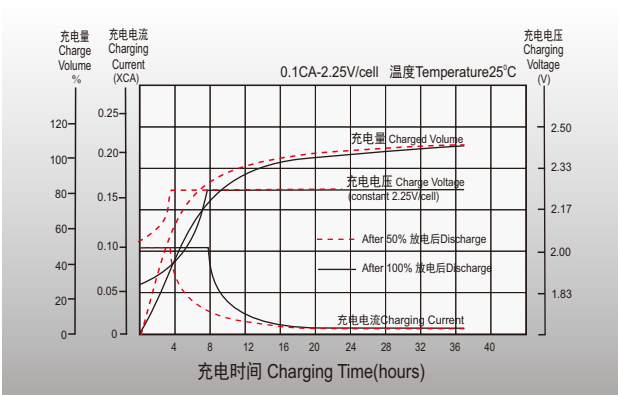

温度对容量影响 Temperature Effects in Relation to Battery Capacity

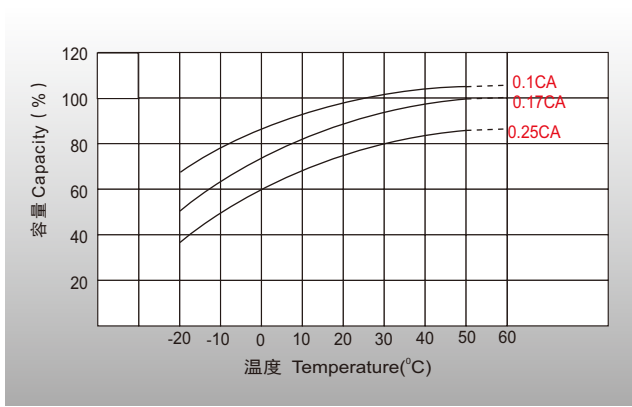

温度对浮充寿命影响 Temperature Effects on Long Term Float Life

